

# Single-handle kitchen sink faucet with sidespray 24278

#### **Features**

- 8-11/16" (220 mm) spout reach
- 1.5 gpm (5.7 lpm) maximum flow rate at 60 psi (4.14 bar)
- Single lever handle makes adjusting water temperature easy.
- Temperature memory allows faucet to be turned on and off at the temperature set during prior usage
- Matching side sprayer provides flexibility and convenience for cleaning and food prep
- KOHLER® ceramic disc valves exceed industry longevity standards for a lifetime of durable performance

## Material

- Premium metal construction for durability and reliability
- Durable STERLING finishes built to resist corrosion

#### Installation

- Two-hole or four-hole installation (escutcheon plate included). Codes/Standards
- Flexible supply lines simplify installation

# Adapters, Rough-in and Extension Kits

1327990 Range: 2-1/2" (64 mm) -4-5/8" (117 mm)



**CSA B651** ADA

ASME A112.18.1/CSA B125.1 NSF/ANSI/CAN 61 NSF/ANSI/CAN 372 DOE - Energy Policy Act 1992 California Energy Commission (CEC) ADA ICC/ANSI A117.1 CSA B651

# STERLING® Faucet Lifetime Limited Warrantv

See website for detailed warranty information.

### **Available Colors/Finishes**


Color tiles intended for reference only.

Color Code Description

CP Polished Chrome



# Single-handle kitchen sink faucet with sidespray 24278

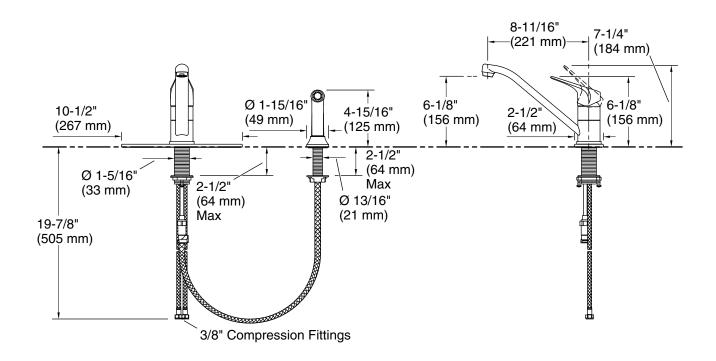

# **Technical Information**

All product dimensions are nominal.

Faucet flow rate: 1.5 gal/min (5.7 l/min)

Spout:

Spout reach: 8-11/16" (220 mm)

#### **Notes**

Install this product according to the installation instructions.

ADA complaint for faucet handles only.

ADA compliant for faucet handles only

ADA, CSA B651 compliant when installed to
the specific requirements of these regulations.