### **Purist<sup>TM</sup>**

K-14402-4A

# KOHLER. Faucets Single-handle bathroom sink faucet with Straight Lever handle, 1.2 gpm

### **Features**

- Single lever handle allows for both volume and temperature control
- 5-1/2" (140 mm) spout reach
- 1.2 gpm (4.5 lpm) maximum flow rate at 60 psi (4.14 bar)
- Includes metal pop-up drain with 1-1/4" tailpiece
- KOHLER® ceramic disc valves exceed industry longevity standards for a lifetime of durable performance
- Temperature memory allows faucet to be turned on and off at the temperature set during prior usage
- Coordinates with Purist faucets, accessories, and showering components to complete your bathroom
- Low-flow aerator option available

### Material

- Premium metal construction for durability and reliability
- KOHLER® finishes resist corrosion and tarnishing

### Installation

- For single-hole installation
- Preattached flexible supply lines simplify installation

### **Recommended Products/Accessories**

K-23726 Drain treatment

K-23723 Faucet cleaner

K-14375 24" Double Towel Bar

K-14377 Pivoting toilet paper holder


K-14435 18" Towel Bar

K-14436 24" Towel Bar

K-14441 Towel Ring

K-14443 Robe Hook

K-14444 Vertical toilet paper holder





**ADA** 

**CSA B651** 

OBC



#### Codes/Standards

ASME A112.18.1/CSA B125.1 NSF/ANSI/CAN 61

NSF/ANSI/CAN 372

All applicable US Federal and State material regulations

DOE - Energy Policy Act 1992

EPA WaterSense™

California Energy Commission (CEC)

ADA

ICC/ANSI A117.1

CSA B651

OBC

### **KOHLER® Faucet Lifetime Limited** Warrantv


See website for detailed warranty information.

#### Available Colors/Finishes

Color tiles intended for reference only.


Color	Code	Description
	CP	Polished Chrome
	SN	Vibrant™ Polished Nickel
	AF	Vibrant™ French Gold
	BN	Vibrant™ Brushed Nickel





### Purist™

## KOHLER Faucets Single-handle bathroom sink faucet with Straight Lever handle, 1.2 gpm K-14402-4A

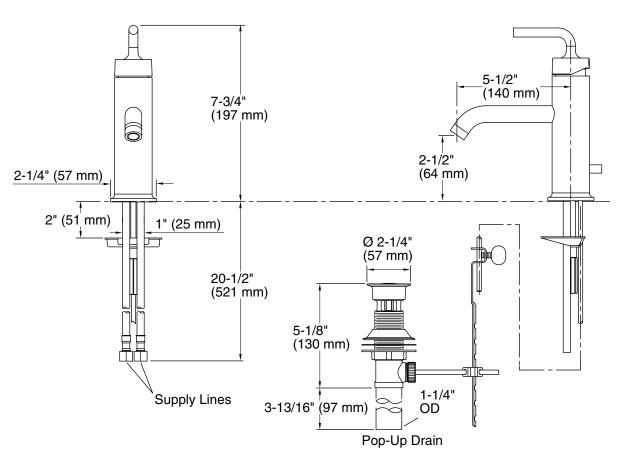

### **Technical Information**

All product dimensions are nominal.

Faucet:

Flow rate: 1.2 gal/min (4.5 l/min)

Pressure: 60 psi (4.1 bar)

Drain included: Yes

Spout:

Spout reach: 5-1/2" (140 mm)

### **Notes**

Install this product according to the installation guide.

ADA compliant for handles only.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these



