



QUICK START GUIDE

CJ1000DXT





THIS QUICK START GUIDE IS NOT A SUBSTITUTE FOR THE INSTRUCTION MANUAL. PLEASE REFER TO THE INSTRUCTION MANUAL AND YOUR VEHICLE'S USER'S MANUAL BEFORE USE.

IF YOU HAVE ANY QUESTIONS, CALL CUSTOMER SERVICE AT 1-877-571-2391

IMPORTANT CHARGING INSTRUCTIONS

1. Immediately charge this unit for a full 40 hours upon receipt. This unit's internal battery is shipped in a partially charged state and must be fully charged before use.
2. Fully charge the unit immediately after purchase, every 30 days and after each use. Lead acid batteries can lose charge over time. Regular recharging can optimize performance and battery life.

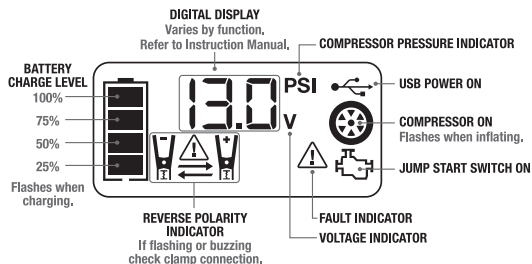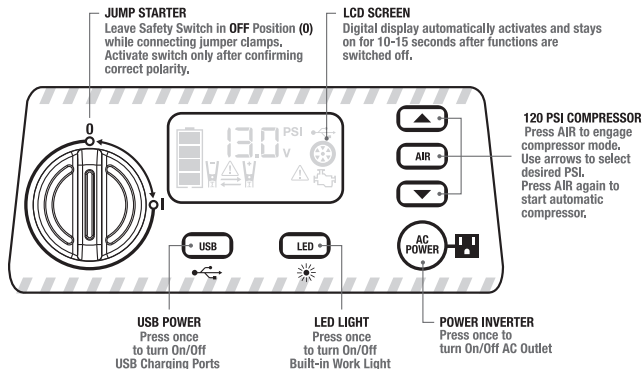

DIGITAL DISPLAY REFERENCE CHART

ICON							
SOLID	UNIT IS FULLY CHARGED	USB POWER IS ON	AIR COMPRESSOR IS ON	VEHICLE HAS STARTED	N/A	CORRECT CLAMP CONNECTION	REVERSE CLAMP CONNECTION
FLASHING	UNIT IS CHARGING	N/A	AIR COMPRESSOR IS INFLATING	READY TO JUMP-START	SYSTEM FAULT DETECTED*	N/A	N/A

* Consult the TROUBLESHOOTING section of Instruction Manual for further info.

AIR COMPRESSOR



1. Connect the Sure Fit® Nozzle to the tire valve stem.
2. Press the AIR button.
3. Press the ▲ and ▼ pressure control buttons to set the desired pressure.
4. Press AIR button again to begin inflating. When the programmed pressure is achieved the unit will automatically stop. To interrupt during inflation, press the AIR button again.

To prevent overheating, Air Compressor will automatically shut off after 10 minutes. Please allow a 30 minute cool down before resuming inflation. Note that the Air Compressor will store the last PSI setting in memory, making it easier to regularly top off your vehicle's tires.

USB POWER



The USB has combined capacity of 6.2A to charge multiple USB devices simultaneously such as Tablets, Smart Phones, Cameras, Bluetooth Speakers, Portable Videogame Consoles and more.

1. Press the USB button on the control panel.
2. Plug the electronic device into any of the USB Ports and operate normally.
3. LCD Screen will display Voltage Indicator and USB Power On icon.

AC POWER



1. Press the AC Power button on the control panel.
2. Digital Display shows FC, indicating the AC Outlet is ready to use.
3. Plug the 120V plug of your tool or appliance into the 120V AC Outlet and operate normally.

AC POWER USAGE CHART*

Streaming Box	3 Watt	Computer monitor	25 Watt
Home phone	3 Watt - 5 Watt	Table Fan	50 Watt
Home Internet Router	5 - 10 Watt	Injet Printer	50 - 80 Watt
Cell Phone Charger	5 - 10 Watt	Gaming Console	50 - 85 Watt
Electric Doorbell transformer ..	5 Watt - 10 Watt	49" LED TV	85 Watt
Portable Gaming Console	7 Watt	Desktop computer	100 - 150 Watt
LED light bulb	9 Watt	Box fan	150 Watt
Clock am/fm Radio	10 Watt - 50 Watt	Computer Laptop	200 Watt
22" LED TV	18 Watt		

* The usage chart is an approximation only. Before use you must refer to device instruction manual.

REVERSE POLARITY ALARM

When battery clamps are connected in reverse polarity, a continuous beep will sound and the LCD screen will display the Reverse Polarity Indicator icon (please see Instruction Manual for details). DO NOT activate the jump starter. If this happens carefully disconnect the clamps and re-connect with the proper polarity. Ensure that the grounded clamp has a firm and clean connection.